


# 422BNUV Liquid



## Silicone Modified Conformal Coating

422BNUV is our 422B 1-part, acrylic-silicone blend conformal coating without UV indicator. It may be removed with strippers, or soldered through for repair or rework.

422BNUV provides improved optical clarity and is intended for use on LED lenses with output <420 nm. It is designed for applications where both high service temperature and flexibility are required. It puts minimum stress on components during thermal cycling, making it ideal for applications that involve a wide temperature range. It provides strong protection against moisture, corrosion, fungus, dirt, dust, thermal shock, short circuits, high-voltage arcing, and static discharge.

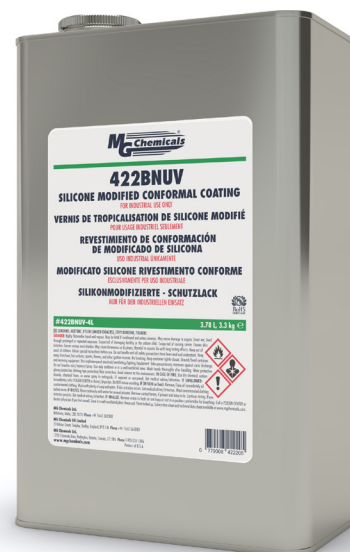

## Features and Benefits

- Optical transmission >99% in the UV-VIS region
- Maximum service temperature of 200 °C
- Suitable for use with selective coating equipment
- Excellent corrosion resistance
- Cures to a durable, flexible and smooth finish

## Available Packaging

| Cat. No.   | Packaging | Net Vol. | Net Wt. |
|------------|-----------|----------|---------|
| 422BNUV-4L | Can       | 3.78 L   | 3.39 kg |

## Contact Information

MG Chemicals, 1210 Corporate Drive  
Burlington, Ontario, Canada L7L 5R6

Email: [support@mgchemicals.com](mailto:support@mgchemicals.com)

Phone: North America: +(1)800-340-0772

International: +(1) 905-331-1396

Europe: +(44)1663 362888

## Cured Properties

|  |                             |
|--|-----------------------------|
| Resistivity                                    | 1.2 x 10 <sup>15</sup> Ω·cm |
| Dielectric Strength                            | 1 056 V/mil                 |
| Dielectric Withstand Voltage                   | >1 500 V                    |
| Dielectric Constant @ 1 MHz                    | 1.99                        |
| Dissipation Factor @ 1 MHz                     | 0.012                       |
| Glass Transition Temperature (T <sub>g</sub> ) | 29 °C                       |
| CTE prior T <sub>g</sub>                       | 275 ppm/°C                  |
| Service Temperature Range                      | -40–200 °C                  |

## Usage Parameters

|                              |                           |
|------------------------------|---------------------------|
| Dry Time To Handle (1 coat)  | 8 min                     |
| (2 coats)                    | 15 min                    |
| Minimum Recoat Time          | 3 min                     |
| Recommended Film Thickness   | 25–75 µm                  |
| Theoretical Coverage @ 25 µm | 70 000 cm <sup>2</sup> /L |

## Uncured Properties

|                   |           |
|-------------------|-----------|
| Viscosity @ 25 °C | 10 cP     |
| Density           | 0.90 g/mL |
| Percent Solids    | 28 %      |
| Shelf Life        | 5 y       |
| Calculated VOC    | 289 g/L   |

# 422BNUV Liquid



## Application Instructions

Read the product SDS before using this product (downloadable at [www.mgchemicals.com](http://www.mgchemicals.com)).

## Recommended Preparation

Clean the substrate with Isopropyl Alcohol, MG #824, so the surface is free of oils, dust, and other residues.

## Recommended Thinner

When thinning is required, use MG #435 Thinner.

## Brush

422B can be applied by brush for rework or touch-ups. Thinning is not required for most brush applications. Desired coating thickness can be achieved in a single application. Applied coating can be cured immediately.

## Manual Spray Guns

Use a standard fluid nozzle gun with a minimum tip diameter of 0.8–1.0 mm. The settings listed below are recommendations; however, performance will vary with different brands:

| Inlet     | Air flow   | Air cap  |
|-----------|------------|----------|
| 20–40 psi | 10–15 SCFM | 8–10 psi |

1. Dilute 1-part coating to 1-part thinner (MG #435 Thinner). Adjust ratio if required.
2. Stir the coating gently, but thoroughly.
3. Spray a test pattern to ensure good flow quality.
4. Tilt the board at 45° and spray a thin even coat from a distance of 20–25 cm (8–10 in). Use spray-and-release strokes with an even motion to avoid paint buildup in one spot. Start and end each stroke off the surface.
5. Wait 3 min between coats to avoid trapping solvent.
6. Rotate the board 90° and spray again to ensure good coverage.
7. Apply additional coats until desired thickness is achieved (go to step 3).
8. Let dry for 8 min at room temperature before applying heat cure.

## Dip Coat

Use a Ford or Zahn cup to monitor the viscosity of the coating, as the solvent will evaporate over time.

1. Hang the PCB on a dipping arm.
2. Slowly lower the PCB into a tank and leave immersed in the coating for 2 min to allow penetration.
3. Slowly withdraw the PCB from the tank at a rate of approximately 6" per minute.
4. Let dry for 3 min before applying additional coats or 8 min before heat cure.

## Selective Coating

For higher volume applications, coating can be applied via selective coating equipment. The settings listed below are recommendations and performance will vary with different brands.

| Settings        | PVA        | Nordson Asymtek |
|-----------------|------------|-----------------|
| Platform        | PVA 650    | SL 940E         |
| Valve           | FCM100     | SC 280N         |
| Dilution        | None       | None            |
| Air Pressure    | N/Av       | 80 psi          |
| Fluid Pressure  | 17 psi     | 23 psi          |
| Dispense Height | 10 mm      | 12.7 mm         |
| Pass Width      | 8 mm       | N/Av            |
| Coating Speed   | 400 mm/sec | 381 mm/sec      |

## Cure Instructions

Allow to dry at room temperature for 48 hours, or after letting sit for 8 minutes, cure the coating in an oven for 20 min @ 65 °C.

## Clean-up

Clean spray system and equipment with MEK or acetone, MG #434.

## Storage and Handling

Store between -5 and 40 °C in a dry area, away from sunlight (see SDS).

## Disclaimer

This information is believed to be accurate. It is intended for professional end-users who have the skills required to evaluate and use the data properly. M.G. Chemicals Ltd. does not guarantee the accuracy of the data and assumes no liability in connection with damages incurred while using it.